

WHERE BEAUTY, DURABILITY AND FUNCTIONALITY LIVE

PREMIUM TFL CLOSET & SHELVING SOLUTIONS

Funder TFL closet and shelving components meet your stock white requirements while offering an expansive variety of sizes, styles and substrates – all with the durability and performance of thermally-fused laminate (TFL). Beautifully-finished edges and a large assortment of designs, including trending solids and woodgrains, deliver storage that stands up to everyday use.

WE ARE CORE NEUTRAL

This means you can match the TFL surface to the substrate that best fits your core needs.

FLEXIBLE DESIGN OPTIONS

Choose from stock white shelving or create your own. Your budget and vision can seamlessly align with materials – ranging from standard to premium.



INTRODUCING EVERPLY™ Our TFL on plywood solution

This proprietary substrate limits warping and swelling from moisture while elevating durability.



WHY TFL?

Thermally-Fused Laminate (TFL) is fused with heat and pressure to a composite core for a strong surface material that offers superior performance.



Durability

Holds up to scratches and dents



Authenticity

Realistic textures create the illusion of real wood without the performance trade-offs.



Moisture resistant

TFL provides a performance surface that holds up for quick and easy cleaning.

Engineered and produced in the U.S.A.

Everyday Applications

Kitchens, Pantries, Closets, Laundry Rooms, Garages, Craft Rooms, Nurseries and More

Standards & Certifications

- EPA Formaldehyde Emission Regulation
- TSCA Title VI compliant
- CPA EC Sustainability Standard
- Carbon Neutral
- Produced using 100% pre-consumer recycled wood fiber

Maintenance

Clean with warm water and mild soaps only. Do not use cleaners with acids, alkalis or abrasives.

Handling & Storage

- Separate units with clean, dry spacers of uniform thickness. Use at least three spacers for panels up to 8' long and four or five for longer panels to prevent warping.
- Store indoors in a dry, clean, ventilated space.
- Avoid temperature and moisture extremes.

	Shelving	Closet Upright
Surface	TFL – Thermally-Fused Laminate	
Core	MDF, Particle Board, or EverPly™	
Edge profile	Square	
Edge treatment	Unfinished, Up to 4 sides edgebanded, UV finished [EverPly only] In .5, 1, 2, or 3mm	
Depth	8", 10", 12"	14"
Length	24", 36", 48"	24", 48", 72", 84"
Thickness	3/4" Pro Standard*	3/4" Pro Standard*
Pre-drilled	None	1 or 2-sided

*Also available in 1/2" and 5/8" depending on load rating, length of span and substrate.

- Keep units off the floor to prevent moisture absorption.
- Allow panels to acclimate to the surrounding conditions for 72 hours before processing.
- Separate units with clean, dry spacers of uniform thickness. Use at least three spacers for panels up to 8' long and four or five for longer panels to prevent warping.
- Refer to CPA Technical Bulletin for shelving design and installation guidelines.




REQUEST YOUR SAMPLES TODAY

fundersales@genesisproductsinc.com

336.751.3501

Shop *quickly*
and easily

iShop **RUGBY**.com

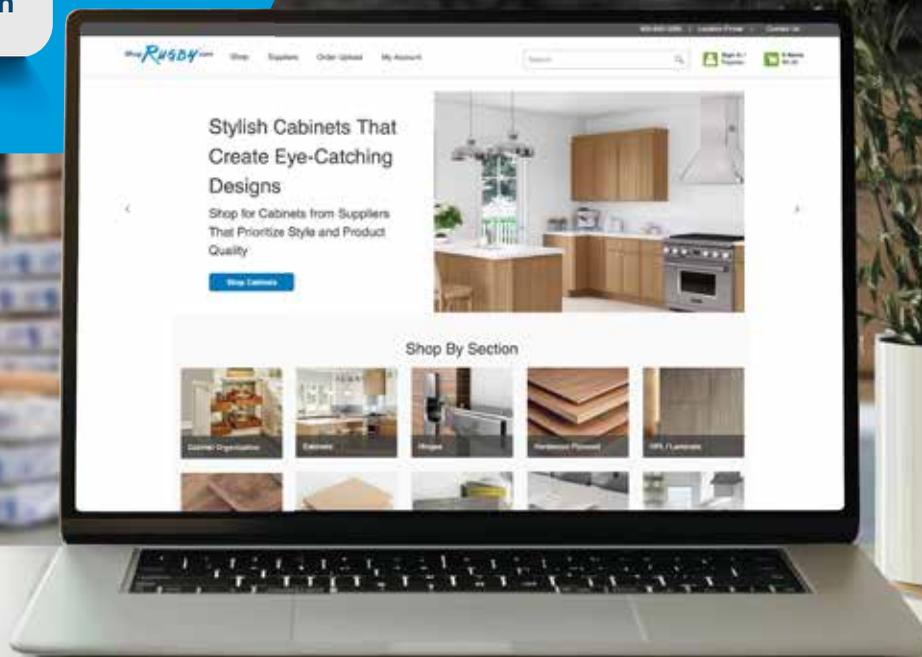

Shop over 125,000 quality products across 30 product categories



Receive real-time inventory updates and personalized catalogs



Get details and spec sheets on many products



Quality Assurance – Ensures products meet high standards



Access hundreds of product brochures from top manufacturers



Automate the ordering process for ease-of-use

Proudly Supplied by

RUGBY[®]
Architectural Building Products

Specification Support by

Design one Source[®]
Where Inspiration and Design Meet Supply

855-650-3265

rugbyabp.com | ishoprugby.com

866-599-1433

designonesource.com